

110V
1PH



OPTIONAL PRE-WIRED SPEED CONTROL
WMP-VFD-N4X-110V RQD.

90W AC MOTOR
0-600 RPM
TEFC
UL,ROHS,CE

HIGH TORQUE
GEAR DRIVE
MULT. RATIOS AVAIL.

BEARING HOUSING
316L ST.ST.

Ø3.67
DIA.

1.25"

2" TC
316L ST.ST.
32ra

3/4" DIA. SHAFT
316L ST.ST.



36.0"
FMB
FULL LENGTH
= 39.25"

SINGLE MECHANICAL SEAL
GRAS CARBON VS. FDA SILICON
USP CLASS VI EPDM O'RINGS
316L ST.ST.

OPTIONS

- AUTOCLAVE MIXER STYLE
- WHISPER QUIET SEAL
- DEBRIS WELL
- ELECTROPOLISH & PASSIVATION / 20ra POLISH
- ALL CUSTOMIZATION
- SPEED CONTROL PRE-WIRED

4" BIO-PROP
SET SCREW
TO SHAFT

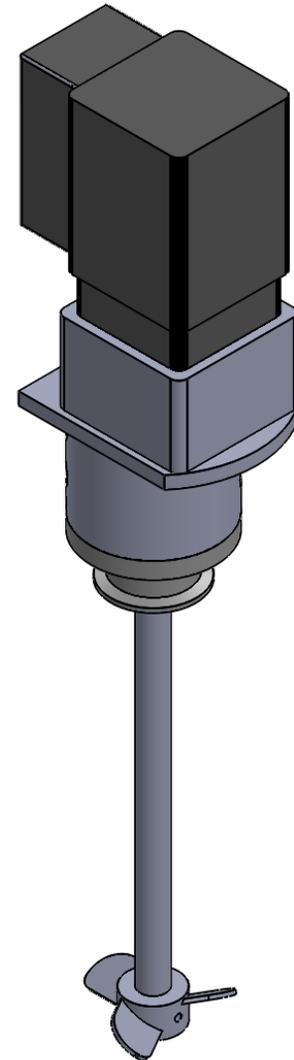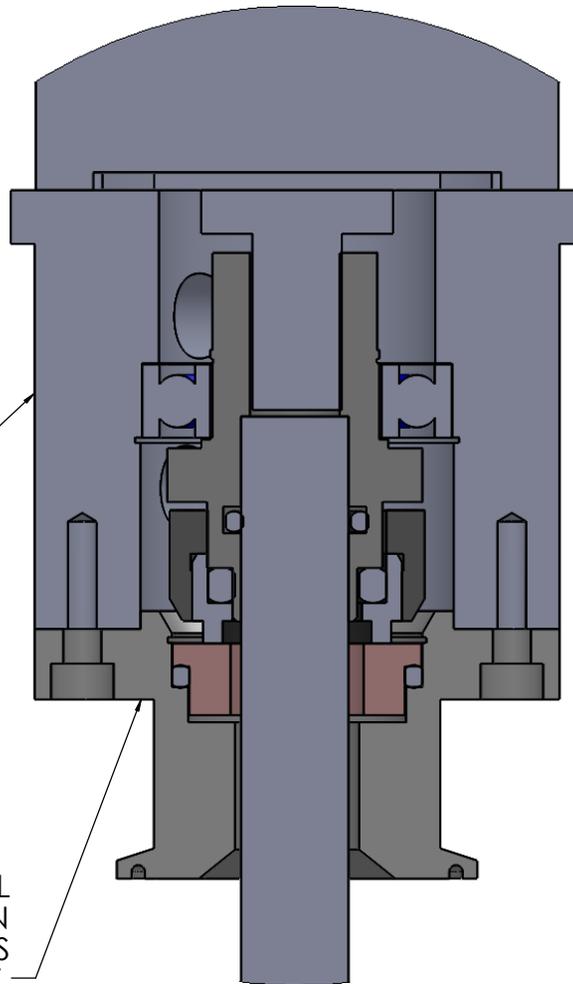

NOTES:
-RUN TESTED
-CGMP DOCUMENTS
-GOLD DOCUMENT PACKAGE
OPTIONAL

WMP-SP-90W-MS

CUSTOMER:	NAME	DATE
LOCATION:	DRAWN	
PRODUCT:	CHECKED	
TEMP:	ENG APPR.	
SPEED:	MFG APPR.	
SIZE:	DIA.	
	SERIAL #	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
[INSERT COMPANY NAME HERE]. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
[INSERT COMPANY NAME HERE] IS
PROHIBITED.



WWW.WMPROCESS.COM

SIZE	DWG. NO.	REV
C	MA1111	
SCALE: 1:4	WEIGHT:	SHEET 1 OF 1